

BraindumpsPass



BraindumpsPass

[HOME](#) [ALL VENDORS](#) [GUARANTEE](#) [FAQ](#) [TESTIMONIALS](#)

[Login / Register](#) [My Shopcart \(3\)](#)

Try before you buy

Download a free sample of any of our exam questions and answers

- ✓ Online Test Engine: Online Tool, Convenient, easy to study. Instant Online Access. Supports All Web Browsers.
- ✓ PDF format: Easy to read and print learning materials, our products are available in PDF file format.
- ✓ Desktop Test Engine: Installable Software Application. Simulates Real Exam Environment. Practice Offline Anytime.

[Download Demo](#)

Security & Privacy

We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.



365 Days Free Updates

Free update is available within 365 days after your purchase. After 365 days, you will get 50% discounts for updating.



Money Back Guarantee

Full refund if you fail the corresponding exam in 60 days after purchasing. And Free get any another product.



Instant Download

After Payment, our system will send you the products you purchase in mailbox in a minute after payment. If not received within 2 hours, please contact us.

<http://www.braindumpsPASS.com/>

The Pass Rate of Our Professional Test Prep is Reaching to 99%.

Exam : **000-350**

Title : IBM WebSphere
Transformation Extender
V8.4 Applic Developmen

Vendor : IBM

Version : DEMO

NO.1 An application developer has a file which consists of fixed length records. The first record is a header record followed by some number of detail records. The number of detail records is expressed by a value found in the header record. How does the developer define this type of data in WebSphere Transformation Extender?

- A. Index the input based on the count in the header record.
- B. Use a Map function to keep track of how many detail records there are.
- C. Write a custom function to store the number of detail records in the map context.
- D. Use a component rule to compare the current record to the value found in the header.

Answer: D

NO.2 What is the primary difference between a choice group and a partitioned group?

- A. A choice group requires that data must be distinguishable; a partitioned group does not.
- B. A partitioned group requires that data must be distinguishable; a choice group does not.
- C. A choice group can have both items and groups as components; a partition group can only have groups as subtypes.
- D. A partitioned group can contain both items and groups as components; a choice group can only contain groups as components.

Answer: C

NO.3 Which two of the following statements are TRUE of syntax items? Syntax items:

- A. are limited to 10 bytes.
- B. can only be defined as character data.
- C. can be defined as character or binary data.
- D. are used as separators between portions of data.

Answer: B,D

NO.4 The image here shows the components of a purchase order:

| Component |
|----------------------------|
| ▶ Header Record |
| ▼ Detail Record (s) |
| ◆ LineItem Number Field |
| ◆ Catalog# Text Field |
| ◆ QtyOrdered Number Field |
| ◆ UnitPrice Number Field |
| ◆ UnitOfMeasure Text Field |
| ◆ Message Text Field |
| ▼ Trailer Record |
| ◆ TotalItems Number Field |
| ◆ OrderTotal Number Field |

The application requires that the total number of items (TotalItems) in the Trailer Record equals the sum of the quantity ordered (QtyOrdered) for each purchase order.


This verification can be performed by a component rule. Which component should have the component rule?

- A. TotalItems

- B. QtyOrdered
- C. Detail Record
- D. Trailer Record

Answer: D

NO.5 Refer to image shown here:

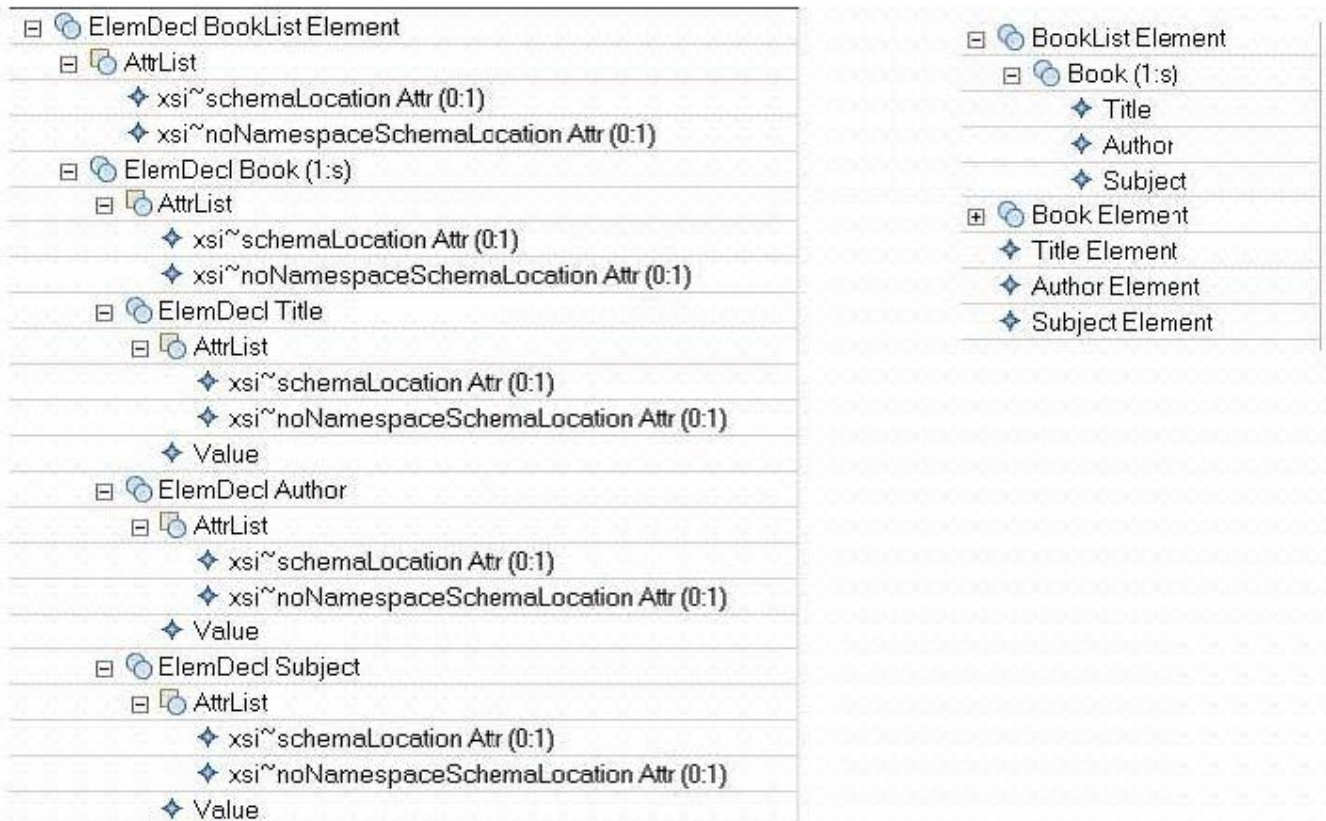

Which of the following statements is TRUE with regards to the type trees created using the XML Schema Importer.

- A. The trees were created with different schemas.
- B. One tree was created using XSDL Hints and Xerces validation.
- C. One tree was created using Classic validation and XSDL Hints.
- D. One tree was created using Classic validation and the other using Xerces validation.

Answer: B

NO.6 The structure of the following file has been partially defined in a type tree:
 ~Smith~Robert~Programmer<NL> ~Doe~John~Manager<NL>

The properties of the types have not been completely defined.



Which of the following options defines the properties for the use of the tilde (~) character in the sample file?

- A. Define ~ as a floating component of the Record type.
- B. Define ~ character as a prefix delimiter of the File type.
- C. Define ~ character as a prefix delimiter of the Record type.
- D. Define ~ character as the initiator and terminator of LastName and FirstName types and initiator of Title type.

Answer: C

NO.7 Which statement about syntax items is TRUE?

- A. They must have a restriction list.
- B. They have a maximum length of 1 byte.
- C. The value must come from the input data.
- D. They cannot be used as variable initiators.

Answer: A

NO.8 Which two of the following statements are TRUE of a component rule? A component rule:

- A. is used to create output.
- B. is used for data validation.
- C. can refer to any other component in the component list.
- D. is always evaluated even if an optional component is not present in the data.

Answer: B,D